


Laser source

Fiber optic cable

IR detector

Oscilloscope  
You will measure the time delay  
between the detector signal and the  
modulation signal

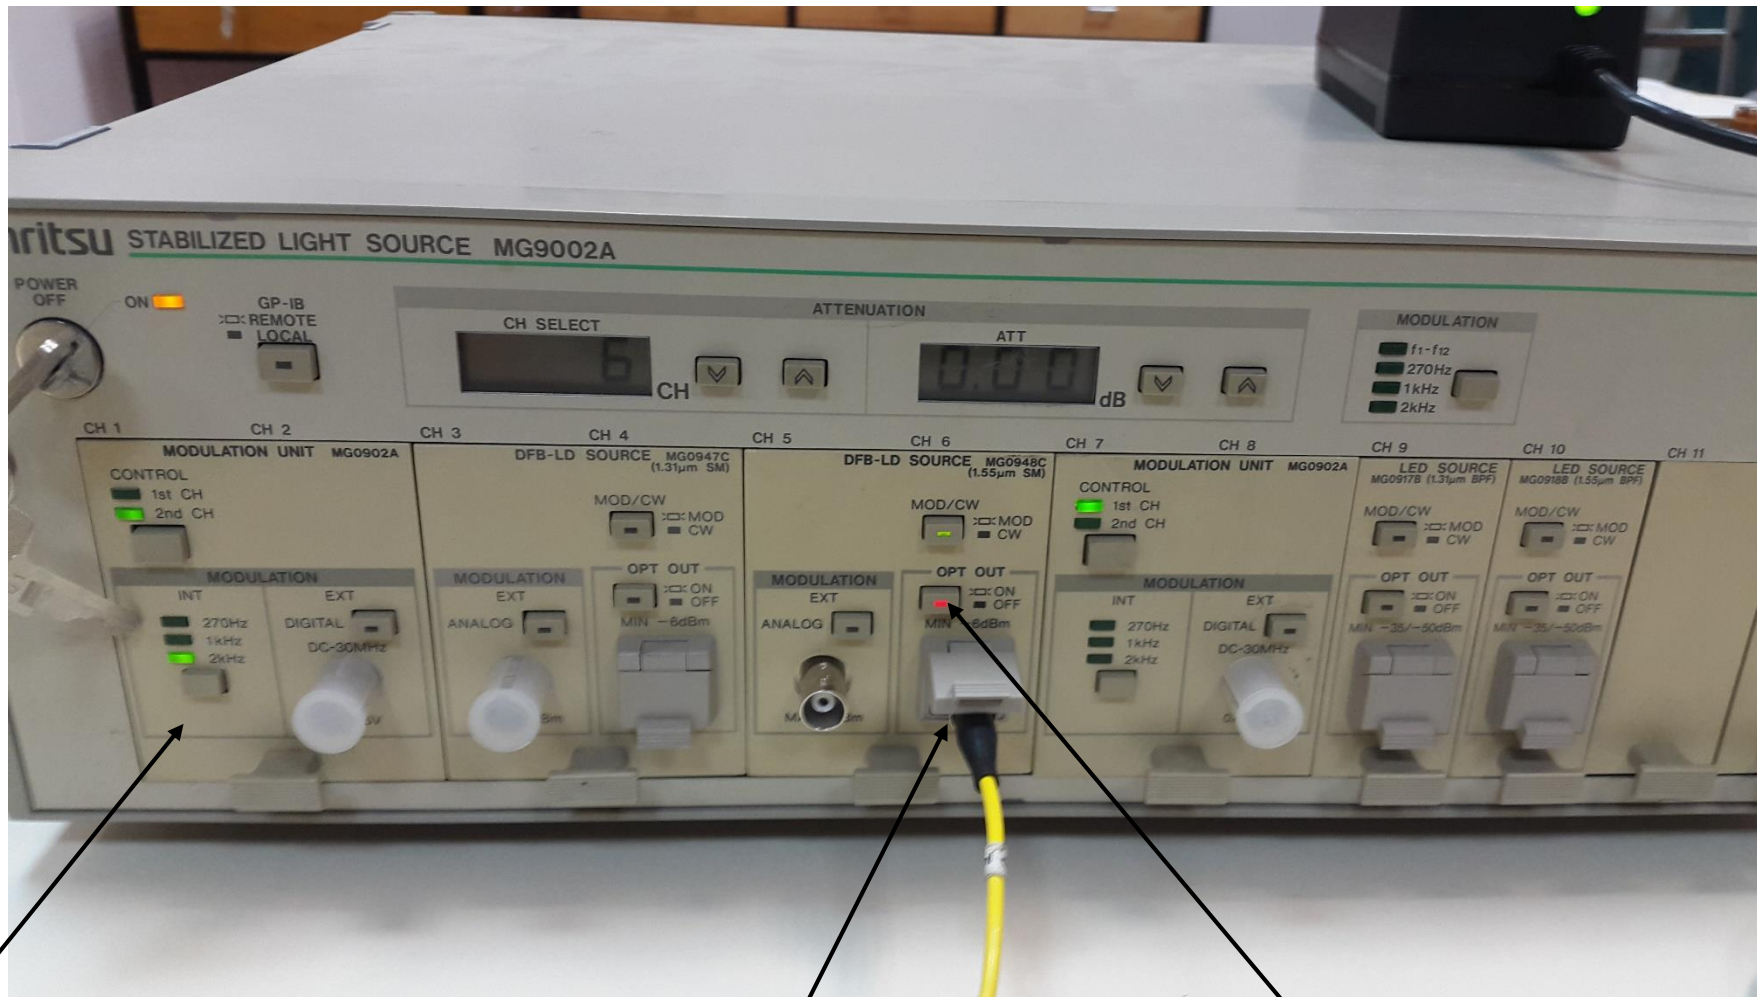

Modulation unit  
To modulate laser source at 2KHz

Laser output  
Connect to the fiber  
optic cable

On/off switch  
Turn this switch off when  
you disconnect the fiber